

Printing & Packaging

Industrial Coatings

Technical Data Sheet

Tinuvin® 928



Product Description


Tinuvin® 928 is UV absorber of the hydroxyphenyl benzotriazole class developed specially for high performance coating applications.

Key Features & Benefits

- Excellent photopermanence
- Excellent spectral coverage
- Designed for use in solvent based & powder coatings

Chemical Structure

2-(2H-Benzotriazol-2-yl)-6-(1-methyl-1-phenylethyl)-4-(1, 1, 3, 3-tetramethylbutyl) phenol

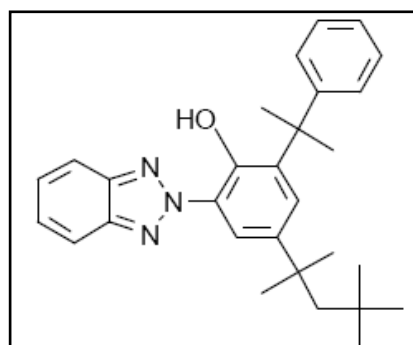

Properties

Typical Properties

CAS No:	73936-91-1
Appearance	light yellow crystalline powder
Molecular weight	441.6
Melting Data	109 - 113 °C


Solubility at 20 °C (g/100 g solution)

butyldiglycol	35
butanol	17
butyl acetate	> 30
butylglycol acetate	9.5
ethylglycol acetate	10
methoxypropyl acetate	9.4
methoxypropanol	2.9
Solvesso 100 ¹	> 30
Solvesso 150 ¹	> 30
n-hexane	> 50
water	< 0.01

¹ Registered trademark of Esso

These typical values should not be interpreted as specifications.

Transmittance Spectrum
in toluene, cell thickness: 1 cm

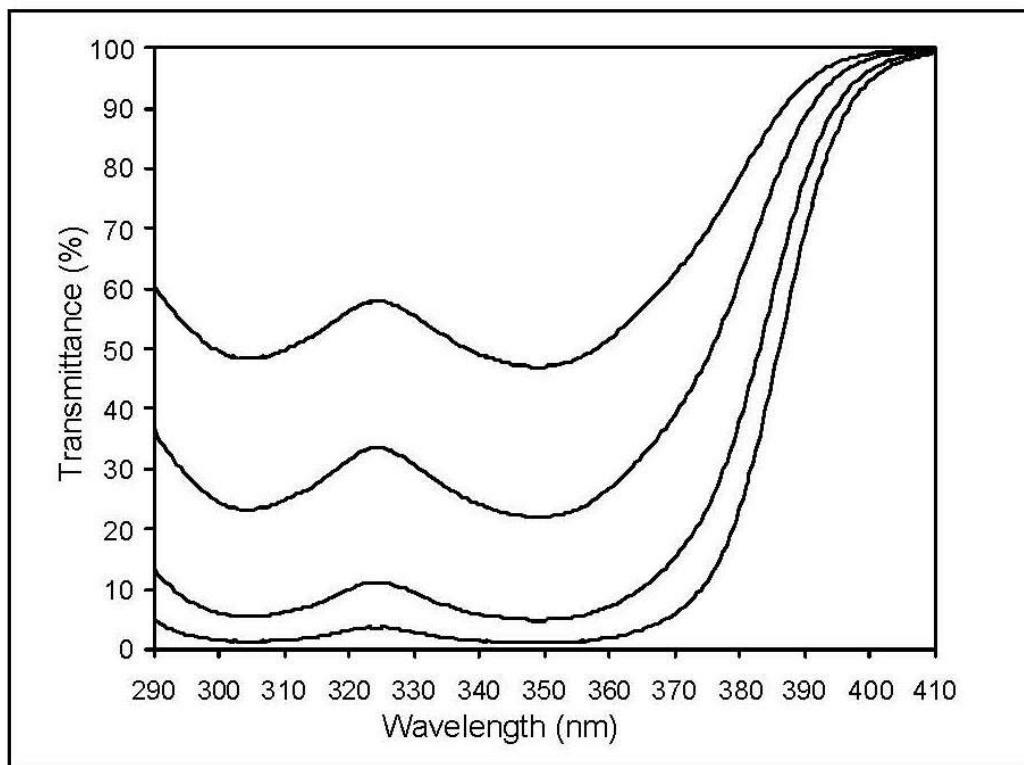

Explanation:

Top Line: 0.001% Tinuvin® 928, corresponds to 0.25% in a 40 µm film
 Second Line: 0.002% Tinuvin® 928, corresponds to 0.50% in a 40 µm film
 Third Line: 0.004% Tinuvin® 928, corresponds to 1.0% in a 40 µm film
 Bottom Line: 0.006% Tinuvin® 928, corresponds to 1.5% in a 40 µm film

Applications

Tinuvin® 928 is a UV absorber of the hydroxyphenyl benzotriazole class developed specially for high performance coating applications. Its characteristic broadband absorption provides efficient protection to coatings and light sensitive substrates. Its excellent solubility and high thermal and environmental permanence makes it particularly suitable for coatings exposed to high temperature curing processes, such as powder and coil coatings, or high environmental stress.

Tinuvin® 928 is recommended for applications such as:

- automotive coatings
- powder and coil coatings

Tinuvin® 928 may be used in combination with a light stabilizer of the sterically hindered amine class (HALS) such as recommended below. Combinations provide best protection against gloss reduction, cracking, blistering, delamination, and color change. Light stabilizers may be added in clear coats, base coats or solid shades. However, according to our experience the optimum protection is achieved by adding the light stabilizers to the topcoat.

The amount of Tinuvin® 928 required for optimum performance should be determined in trials covering a concentration range.

Recommend Concentrations

Powder coatings	1.0 – 3.0 %	Tinuvin® 928
	+	
	0.5 – 2.0 %	Tinuvin® 144 or Tinuvin® 111 FD
Liquid coatings	1 – 3 %	Tinuvin® 928
	+	
	0.5 – 2 %	Tinuvin® 292 or Tinuvin® 123

(concentrations are based on weight percent binder solids)

Safety

General

The usual safety precautions when handling chemicals must be observed. These include the measures described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care and wearing of protective goggles.

Safety Data Sheet

All safety information is provided in the Safety Data Sheet Tinuvin® 928.

Important

While the descriptions, designs, data and information contained herein are presented in good faith and believed to be accurate, they are provided for guidance only. Because many factors may affect processing or application/use, BASF recommends that the reader make tests to determine the suitability of a product for a particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESCRIPTIONS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS.** In no case shall the descriptions, information, data or designs provided be considered a part of BASF's terms and conditions of sale. Further, the descriptions, designs, data, and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained all such being given and accepted at the reader's risk.

Tinuvin is a registered trademark of BASF Group.

© BASF Corporation, 2016



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.

For more information on Responsible Care® go to:

U.S.: www.basf.us/responsiblecare_usa

Canada: www.basf.us/responsiblecare_canada

México: www.basf.us/responsiblecare_mexico

U.S & Canada

BASF Corporation
24710 W Eleven Mile Road
Southfield, MI 48033
ph: 1(800) 231-7868
fax: 1(800) 392-7429
Email: Custserv_charlotte@basf.com
Email: edtech_info@basf.com
www.basf.us/dpsolutions

Mexico

BASF Mexicana, S.A. de C.V.
Av. Insurgentes Sur # 975
Col. Ciudad de los Deportes
C.P. 03710
Mexico, D.F.
Phone: (52-55) 5325-2756
Fax: (52-55) 5723-3011