

Printing & Packaging Industrial Coatings

Technical Data Sheet

Tinuvin® 5060



Product Description

Tinuvin® 5060 is a solvent-free, liquid blend of a 2-(2-hydroxyphenyl)-benzotriazole UV absorber (UVA) and a non-basic hindered amine light stabilizer (HALS) designed to fulfill the high cost/performance and durability requirements of exterior solvent borne industrial and decorative coatings and is especially suited for oxidative drying and acid catalyzed systems.

Key Features & Benefits

- Synergistic blend of UVA/HALS for solvent-based coatings
- Provides excellent photo-protection for coatings against loss of gloss, cracking, and color change
- NOR HALS, low basicity HALS enables formulating with acidic materials including acid catalysts and acidic pigments

Chemical Composition

Blend of 2-(2-hydroxyphenyl)-benzotriazole UVA and a non-basic HALS

Properties

Typical Properties

Appearance
Dynamic Viscosity at 25°C
Density at 20°C


viscous amber liquid
10,000 cps
0.98 g/ml

Miscibility

Tinuvin® 5060 is miscible to more than 50% with most commonly used paint solvents. Water miscibility is less than 0.01%.


These typical values should not be interpreted as specifications.

UV Absorbance Spectrum (40 mg/l in chloroform, cell thickness = 1 cm)

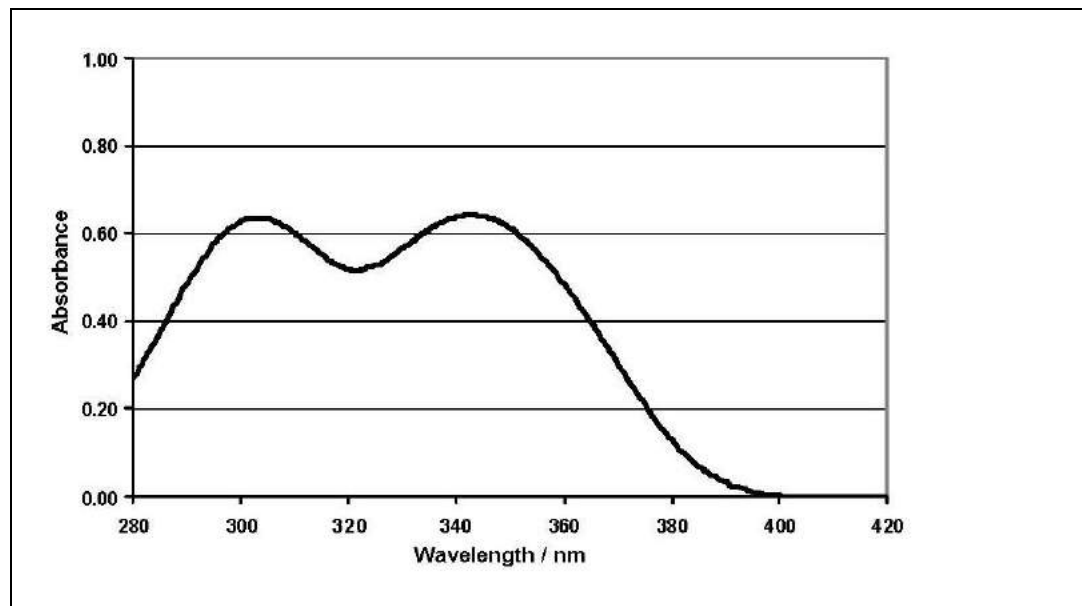

UV Transmission Spectrum

(The theoretical concentration of the UVA in an applied 40 µm clear coat was calculated as a function of the concentration in chloroform ($d = 1.48 \text{ g/cm}^3$) with the help of the Lambert-Beer law)

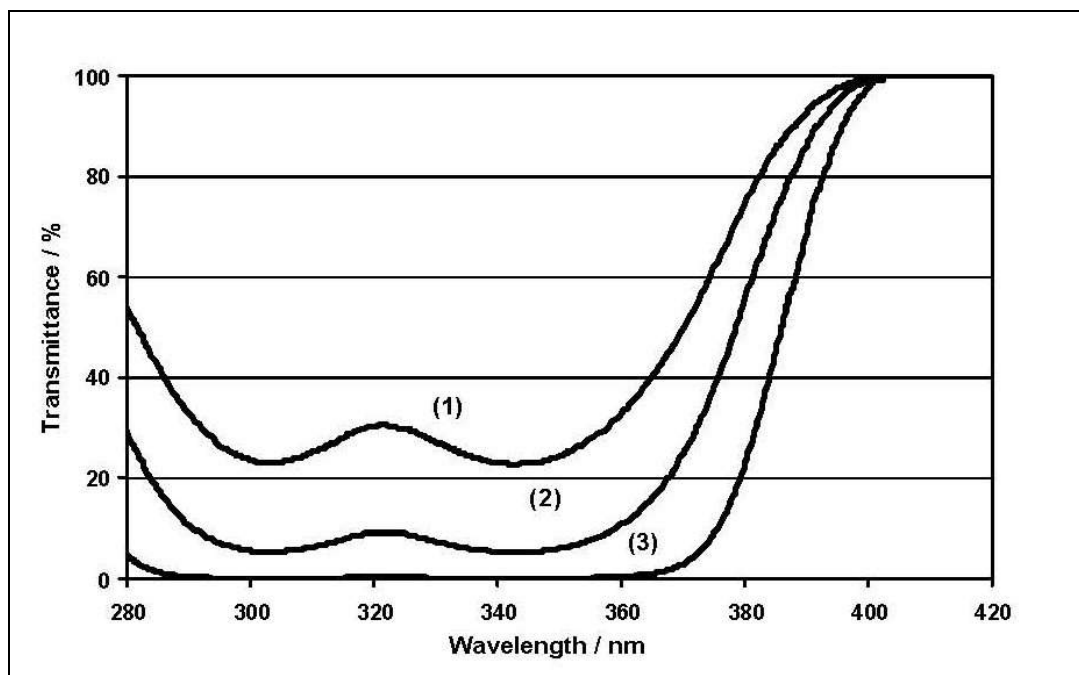

Line one: 0.003 % Tinuvin® 5060 corresponds to 0.38% active UVA in a 40 µm film
Line two: 0.005 % Tinuvin® 5060 corresponds to 1.35% active UVA in a 40 µm film
Line three: 0.014 % Tinuvin® 5060 corresponds to 3.38% active UVA in a 40 µm film

Applications

Tinuvin® 5060 is a versatile light stabilizer that can be used in a variety of coatings systems such as:

- Wood stains and varnishes, wood care products, waxes
- General Industrial Paints
- Heavy duty maintenance and marine coatings
- Architectural coatings (roof tiles, walls, floor coatings)
- Glass and ceramic coatings (architectural glazing, packaging)
- Adhesives and bonding layers

Its use is especially recommended for clear and light pigmented systems like:

- Thermoplastics (Acrylics, Vinylics)
- Acid-catalyzed paints (Acrylic, PES/melamine)
- Oxidative drying systems (Alkyds, oils, waxes)

The broad UV absorbance of the used UVA of Tinuvin® 5060 makes it suitable for a wide range of coatings for wood, plastics, and metal. The non-basic character of the used NOR HALS prevents possible interactions with acidic paint ingredients such as catalysts, biocides, and pigments. The synergistic combination imparts superior coating protection against gloss reduction, cracking, blistering, delamination, and color change and provides full substrate protection.

Recommended concentrations

The amount of Tinuvin® 5060 required for optimum performance should be determined in trials covering a concentration range.

The dry film thickness (DFT) directly affects the amount of UVA needed. The following amounts are recommended to achieve proper stabilization for given DFT (light stabilizers % is indicated on total formulation):

10 µm – 20 µm:	8.0 % – 4.0 %
20 µm – 40 µm:	4.0 % – 2.0 %
40 µm – 80 µm:	2.0 % – 1.0 %

Safety

General

The usual safety precautions when handling chemicals must be observed. These include the measures described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care and wearing of protective goggles.

Safety Data Sheet

All safety information is provided in the Safety Data Sheet Tinuvin® 5060.

Important

While the descriptions, designs, data and information contained herein are presented in good faith and believed to be accurate, they are provided for guidance only. Because many factors may affect processing or application/use, BASF recommends that the reader make tests to determine the suitability of a product for a particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESCRIPTIONS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS.** In no case shall the descriptions, information, data or designs provided be considered a part of BASF's terms and conditions of sale. Further, the descriptions, designs, data, and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained all such being given and accepted at the reader's risk.

Tinuvin is a registered trademark of BASF Group.

© BASF Corporation, 2016



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.

For more information on Responsible Care® goto:

U.S.: www.basf.us/responsiblecare_usa

Canada: www.basf.us/responsiblecare_canada

México: www.basf.us/responsiblecare_mexico

U.S & Canada

BASF Corporation
24710 W Eleven Mile Road
Southfield, MI 48033
ph: 1(800) 231-7868
fax: 1(800) 392-7429
Email: Custserv_charlotte@basf.com
Email: edtech_info@basf.com
www.basf.us/dpsolutions

Mexico

BASF Mexicana, S.A. de C.V.
Av. Insurgentes Sur # 975
Col. Ciudad de los Deportes
C.P. 03710
Mexico, D.F.
Phone: (52-55) 5325-2756
Fax: (52-55) 5723-3011